

## How it Works.



**It starts at Full-Flow....**

**Then cuts the flow when time is up!**

The Shower Manager Commercial Model works by providing a full-flow of water for a pre-set time period, that you choose (5 or 7 minutes). When time expires, the Shower Manager automatically cuts the flow by two-thirds, indicating it is time to exit, yet still allows for a final rinse. A beep warns that one minute remains. For rapid turnover, a one minute reset period starts when the shower is shut off.

## Tips for successful use.

### Get the customer on board!

Inform your shower users about these conservation efforts, and what to expect when using the Shower Manager.

### Plan ahead!

During the one minute reset period only a reduced flow of water is available. The Shower Manager will start in Full-Flow Mode, only after this time has elapsed.

## Typical installation.

The Shower Manager is designed to fit between your standard shower head and a single water supply pipe.

The universal threads allows for use with standard plumbing in the US, UK and around the world.

Works best with shower heads with flows of 2.2 GPM.

### Notes:

The Shower Manager is sensitive to pressure and flow changes, so it is not recommended for use in combination with other flow-controlling devices or accessories that cause significant pressure changes, such as:

- ⊗ Pulsating or massaging shower heads
- ⊗ Shower heads equipped with on/off valve
- ⊗ Hand-held shower heads
- ⊗ Oxygen combining shower heads
- ⊗ Ultra-low flow shower heads with less than 1.8 GPM
- ⊗ In homes with very low water pressure (<40 PSI)


While these types of shower heads may work, they may also introduce problems when used in conjunction with the Shower Manager.

**Important:** Do not attach a shower head on an extension arm, of any size, to the Shower Manager as this can damage the unit and void your warranty.



We are working hard to make the Shower Manager great. Please share your experience with us on Facebook.  
Facebook.com/ShowerManager

Shower Manager, LLC  
2942 S. Trenton Street  
Denver, CO 80231

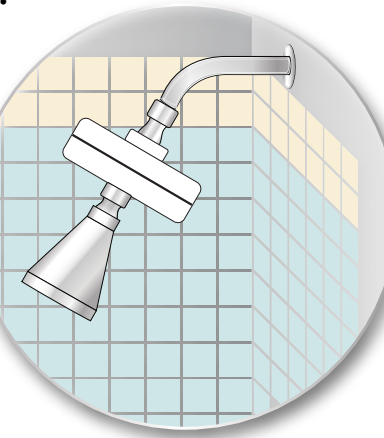

## LIMITED WARRANTY



### 1 Year Manufacturer Defects

If your unit fails within one year from date of purchase and is deemed to be defective by the manufacturer, it will qualify for a no-cost replacement.

### 90 Day Satisfaction Guarantee

If, within 90 days, you are not satisfied for any reason, you are welcome to return the unit for a full refund of your purchase price.

### Repair/Replacement Program

For situations within the first year of purchase, where the no-cost replacement does not apply, we offer a low-cost option.

### Upgrade Program


For our faithful customers with units up to three years from the date of purchase, return your old unit to qualify for significant savings off a new Shower Manager.

[www.ShowerManager.com/warranty/](http://www.ShowerManager.com/warranty/)

303-695-5540  
info@ShowerManager.com


**Be Safe!** - Before starting, ensure the bath / shower is free of water, soap or other slip, fall and trip hazards.

### What's in the box?



- 1 Shower Manager (Battery Installed)
- 1 Instruction Sheet
- 1 Rubber Washer for Inlet
- 1 Programming Magnet

Missing something?  
[www.ShowerManager.com/parts/](http://www.ShowerManager.com/parts/)

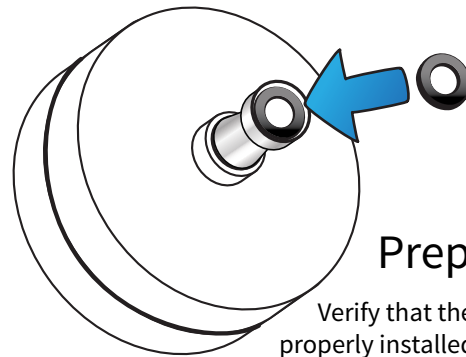

### Prepare for use.

Verify that the rubber washer is properly installed in the water inlet. Make sure the washer is placed flat and tight against the bottom of the inlet. When correctly installed, this washer provides a drip-free seal for the majority of users.




**Important :** Use of anything other than Teflon tape will damage the Shower Manager & void the warranty.

### Optional:

In the event of drips due to damaged threads preventing a good seal with the washer, it is recommended to wrap the threads on the shower neck with 2-3 wraps of Teflon thread seal tape (PTFE plumber's tape not provided).

In extreme cases it may require additional wraps of Teflon Tape to stop dripping. It is best practice to start with less and add more only if needed.

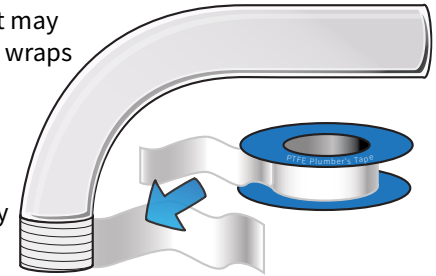


**Note:** Be sure the plumber's tape does not extend past the threads where it can block the supply pipe. Also be careful to ensure tape ends/pieces do not end up in the inlet where it can damage the Shower Manager and void the warranty.

### Setting the shower time.

The Shower Manager comes ready to use, pre-programmed with the 5 minute full-flow setting, for maximum water and energy savings.

#### How to change the shower time.

Locate the magnet below and place it on the Shower Manager as shown by the blue arrow in the illustration to the right.




**Notice:** The line (raised bar) on the side for correct placement of the magnet. Slowly move the magnet from the front to the back along this line until you hear 1-2 beeps. The number of beeps indicates the current time setting.

To change the time setting, repeat the placement of the magnet on the line, but this time, hold it there until the number of beeps changes to correspond with your desired time setting. Wait two full minutes for the unit to restart, before turning on the shower.

**Important:** The unit can't be programmed while in full-flow, reduced-flow, or during the reset period. If the unit refuses to respond to programming, wait a full two minutes before trying again.


#### Beep Key

- 1 beep = 5 minutes
- 2 beeps = 7 minutes



Having trouble?  
[www.ShowerManager.com/troubleshooting/](http://www.ShowerManager.com/troubleshooting/)

### Installing the Shower Manager.



**1)** Remove existing shower head.



**2)** Carefully thread Shower Manager onto the shower neck until snug then approximately 1/4 turn until hand-tight and drip-free.



**3)** Replace shower head. Do not over-tighten as this can damage the unit and cause leaks.

Having trouble? [www.ShowerManager.com/install/](http://www.ShowerManager.com/install/)